
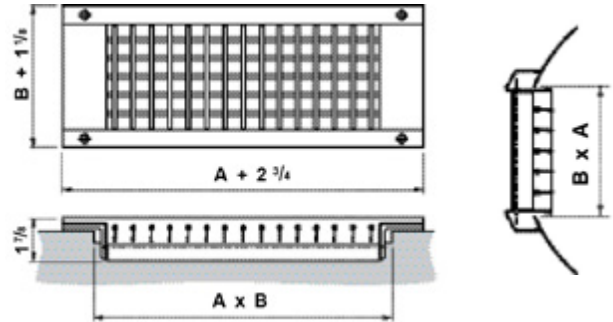


Duct-mounted register

DMR

44

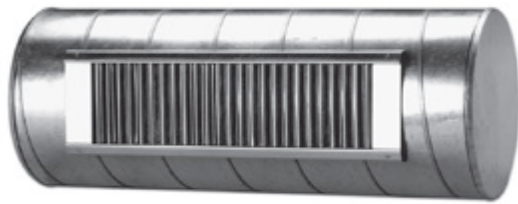

Description

supply/return register with adjustable double deflection blades and volume damper (loose)

- designed for direct mounting
- rectangular register taps are not required
- register made of galvanized sheet steel
- damper made of electro-galvanized sheet steel

Order Example

Gustafson Nongasketed
DMR - A x B

Register nom. size (in)	Min. duct diameter (in)	Free area (ft ²)	Duct opening A x B (in)	Weight (lb)
13 x 3	6	0.18	12 3/4 x 3	2.4
17 x 3	6	0.25	16 3/4 x 3	3.1
21 x 3	6	0.30	20 5/8 x 3	3.7
25 x 3	6	0.36	24 5/8 x 3	4.2
33 x 3	6	0.48	32 1/2 x 3	5.3
41 x 3	8	0.60	40 3/8 x 3	6.4
49 x 3	8	0.73	48 1/4 x 3	7.1
13 x 6	12	0.36	12 3/4 x 6	3.1
17 x 6	12	0.48	16 3/4 x 6	4.2
21 x 6	12	0.60	20 5/8 x 6	5.1
25 x 6	12	0.73	24 5/8 x 6	5.7
33 x 6	12	1.00	32 1/2 x 6	7.7
41 x 6	12	1.20	40 3/8 x 6	8.6
49 x 6	12	1.46	48 1/4 x 6	9.7
13 x 9	20	0.60	12 3/4 x 8 7/8	4.8
17 x 9	20	0.80	16 3/4 x 8 7/8	6.6
21 x 9	20	1.00	20 5/8 x 8 7/8	7.5
25 x 9	20	1.20	24 5/8 x 8 7/8	8.2
33 x 9	20	1.60	32 1/2 x 8 7/8	11.2
41 x 9	20	2.00	40 3/8 x 8 7/8	12.8
49 x 9	20	2.41	48 1/4 x 8 7/8	13.9