


Drum louver

DRLAA

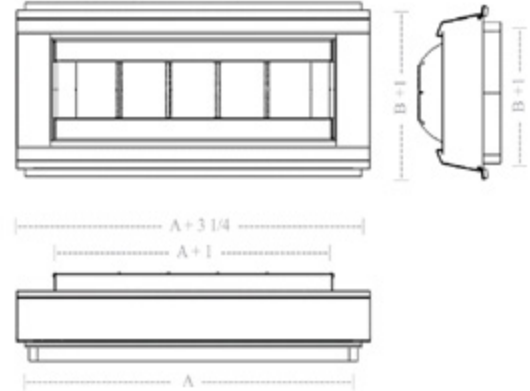

45

Description

quality moisture-proof construction throughout with a gasket locked into a frame channel for a positive seal around the barrel

- extruded vanes – spaced 3 inches apart on bolt pivots to firmly hold deflection settings
- adjustable pattern – vanes pivot easily to reduce
- rotating barrel - 60° total, 30° up or down from the horizontal center line
- aluminum mill finish frame and barrel

A Width (in)	B Height (in)			
	6	10	12	15
9	X			
12	X			
15	X			X
18	X			
20		X	X	
21				X
24	X	X	X	X
27				X
30	X	X	X	X
36	X	X	X	X
42		X	X	X
48	X	X	X	X
54		X	X	X
60	X	X	X	X
66		X	X	X
72		X	X	X

Order Example

Gustafson Nongasketed
DRLAA - A x B